

CCT 4-ZONE REMOTE

DESCRIPTION:

The ORA CCT 4-Zone Remote provides wireless control of compatible tunable white LED lights and controllers. Adjust brightness and color temperature, operate four lighting zones independently, or control all linked zones together using the master buttons.

FEATURES:

- Adjustable brightness and warm-to-cool white color temperature.
- Independent on/off control for four lighting zones.
- Master on/off buttons for all linked zones.
- Night light mode for individual zones or all linked lights.
- Supports multiple compatible lights within each zone.
- Low power consumption and interference-resistant wireless communication.

APPLICATIONS:


- Tunable white LED strip lighting.
- Zoned lighting in bedrooms and living areas.
- Adjustable white lighting in offices and retail spaces.
- Accent and ambient lighting with compatible controllers.

TECHNICAL SPECIFICATIONS:


Input Voltage	3 V DC
Battery Type	2 × AAA
Standby Current	5 μ A
Transmitting Power	6 dBm
RF Band	2.4 GHz
Transmission Frequency	2400–2483.5 MHz
Modulation Method	GFSK
Control Distance	Up to 98.4 ft
Lighting Zones	4
Control Functions	On/off, brightness, color temperature, and night light mode
Operating Temperature	14°F to 104°F
Use Environment	Dry indoor locations
Compatibility	Compatible ORA tunable white LED lights and controllers

REMOTE CONTROL BUTTONS & FUNCTIONS:

- All Zones: Press “Master ON,” then adjust brightness or color temperature for all linked lights.
- Individual Zone: Press the desired “Zone ON” button, then adjust brightness or color temperature for that zone.
- Brightness: Press “Brightness +” to increase brightness or “Brightness -” to decrease it.
- Color Temperature: Press “Warmer White” or “Cooler White” to adjust the white light tone.
- Zone Night Light Mode: Press and hold the desired “Zone OFF” button.
- All Zones Night Light Mode: Press and hold “Master OFF.”

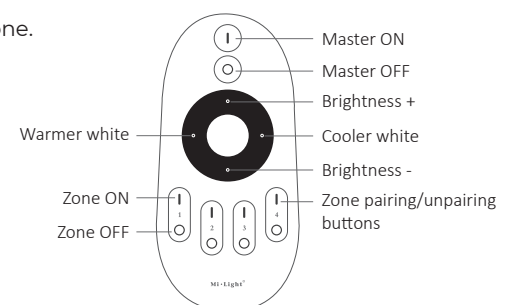


DIMENSIONS:

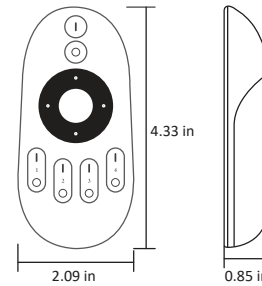

REMOTE PAIRING & UNPAIRING INSTRUCTIONS:


The light must be paired with the remote before it can be controlled.

PAIRING:

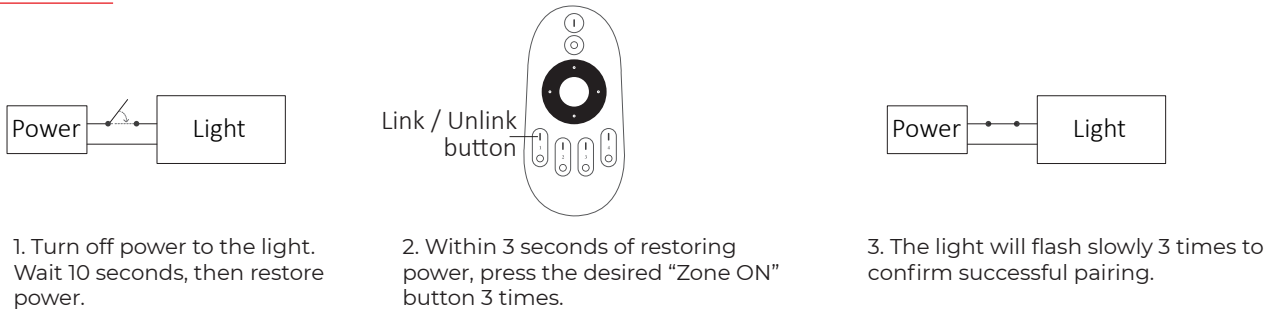

! If the light does not flash slowly, repeat the steps. A light already paired to that zone does not need to be paired again.


UNPAIRING:

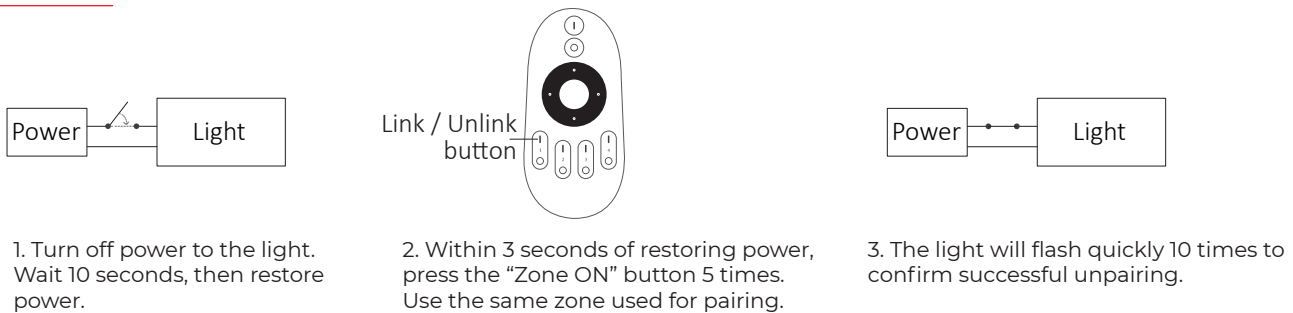

! If the light does not flash quickly, repeat the steps. A light that is not paired does not need to be unpaired.

LIGHT GROUPING & ZONE CONTROL:

Each of the four zones supports an unlimited number of compatible lights or controllers. Pair lights with the desired zones to create flexible groups, as shown in the examples below.

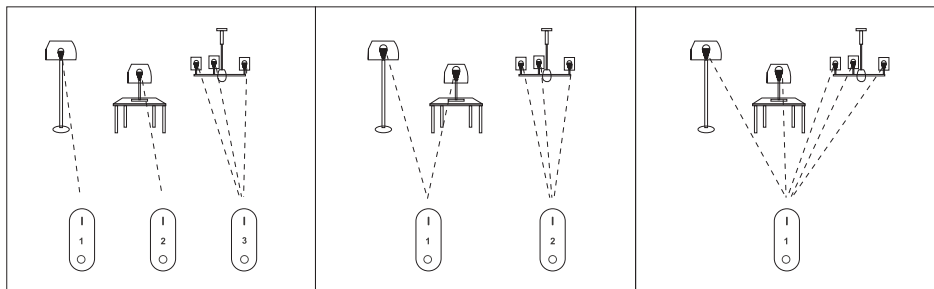

Notes:

- Groups can be reconfigured as needed. One remote can control multiple lights or controllers, while each light or controller supports a maximum of four remotes.
- Before pairing or reconfiguring, check that the batteries are installed correctly and allow the controller to fully discharge after switching off power before turning it back on.

USE & CARE PRECAUTIONS:

- This remote works only with compatible ORA products. Compatibility does not extend to all ORA models.
- Replace the batteries promptly if the remote's indicator flashes rapidly. Use quality batteries to help prevent leakage and damage.
- Avoid use in humid, hot, dusty, or high-voltage environments. Store indoors in a dry location free from static electricity.
- Avoid use near large metal surfaces or strong electromagnetic interference, as these may reduce the control range.

COMPATIBLE PRODUCTS:



2-in-1 LED Strip Controller
SKU: MILI-CONT-2INI-CCT-DIM



G3 LED WiFi Gateway
SKU: MILI-WIFI-BRIDGE-G3

MADE IN CHINA