

CCT 4 ZONE TOUCH PANEL WALL REMOTE

DESCRIPTION:

The CCT 4-Zone Touch Panel Wall Remote is a sleek, wireless wall-mounted controller designed for intuitive and precise control of tunable white (CCT) LED lighting systems. Featuring advanced capacitive touch technology, this remote offers smooth control over brightness and color temperature. Its 2.4GHz RF transmission ensures reliable, long-distance performance. The remote can manage up to four zones independently, making it ideal for modern, multi-area lighting setups. Magnetic mounting simplifies installation and removal for battery replacement.



FEATURES:

- High-precision capacitive touch IC for accurate response
- Sleek, glass touch panel with soft backlight for low-light visibility
- Magnetic wall-mount design for easy installation and removal
- 2.4GHz RF wireless transmission with strong anti-interference performance
- Independent control of up to four lighting zones
- Smooth dimming and color temperature adjustment
- Low power consumption with long battery life
- Quick and responsive switching with real-time feedback
- User-friendly layout with clearly marked zone and control buttons




APPLICATIONS:

- Residential smart lighting systems
- Office and commercial space illumination control
- Retail lighting with adjustable ambiance
- Multi-zone LED strip and panel light setups
- Wireless remote control for CCT LED controllers


TECHNICAL SPECIFICATIONS:

Working Voltage	3V (2 × AAA batteries)
Standby Power Consumption	20μA
Transmitting Power	6dBm
Wireless Frequency	2.4GHz
Transmission Frequency Range	2400–2483.5MHz
Modulation Method	GFSK
Control Distance	Up to 98.4 ft
Operating Temperature Range	14°F to 104°F

DIMENSIONS:

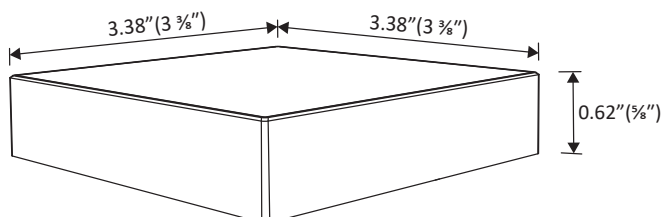


KEY FUNCTIONS:

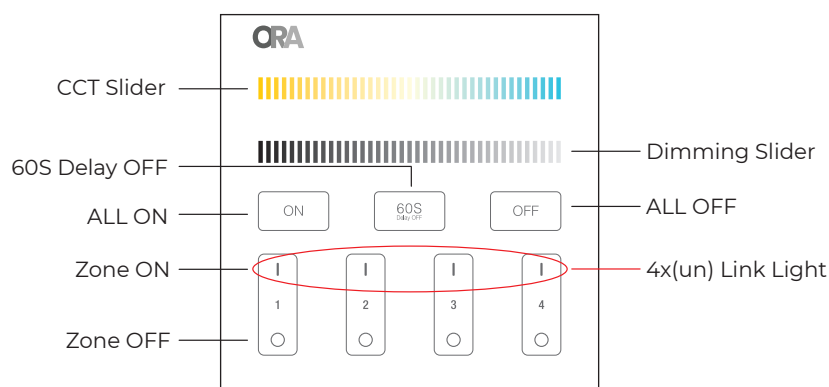


- Slide to change the color temperature.
- Slide to adjust brightness from 1% to 100%.
- Tap Master ON to turn on all linked lights. Press and hold for 5 seconds to activate the indicator sound.
- When the light is on, press '60S Delay OFF' to automatically turn off the light after 60 seconds.
- Tap Master OFF to turn off all linked lights. Press and hold for 5 seconds to deactivate the indicator sound.
- Tap Zone ON to activate lights in the selected zone.
- Tap Zone OFF to deactivate lights in the selected zone.


LINKING INSTRUCTIONS:



- 1 Turn off the light, wait for 10 seconds, then turn it on again.

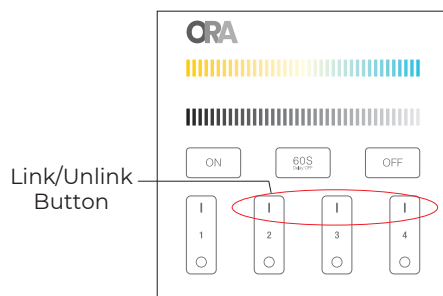


- 2 When the light is on, press any zone "I" button three times within 3 seconds.




- 3 If the light blinks slowly three times, the linking has been successfully completed.

If the light does not blink slowly, the linking has failed. Please turn off the light and repeat the steps above.

UNLINKING INSTRUCTIONS:




- 1 Turn off the light, wait for 10 seconds, then turn it on again.

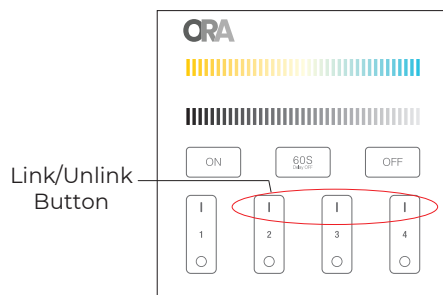

- 2 When the light is on, press "I" five times within 3 seconds.


Unlinking must be performed in the same zone as the linking.




- 3 If the light blinks ten times quickly, the unlinking has been successful.

If the light does not blink quickly, the unlinking has failed. Please turn off the light and repeat the steps to unlink again.


INSTALLATION:

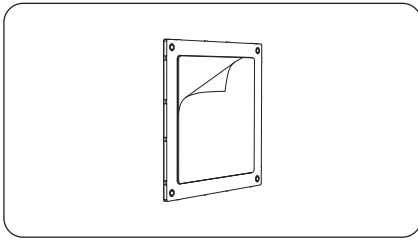


1. Remove the backing tape.

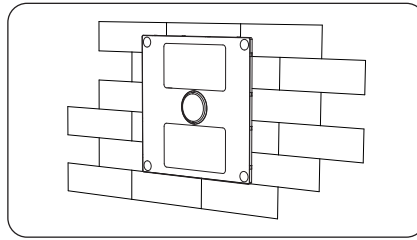

2. Attach the holder to the desired position.

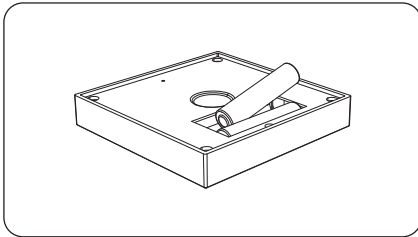

3. Insert 2 × AAA batteries.

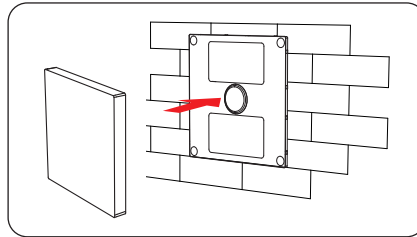

4. Place the rotating switch on the front of the holder.

ATTENTION:

1. Before powering on, ensure the cable is properly connected and the circuit is correct.
2. During installation, handle the T series glass panel carefully to avoid damage.
3. Avoid placing lighting fixtures near metal surfaces or high magnetic fields, as this can significantly reduce the control distance.

COMPATIBLE PRODUCT (SOLD SEPARATELY):



Smart WiFi LED Controller Gateway – G3 with Voice Control
SKU: MILI-WIFI-BRIDGE-G3