

SINGLE COLOR DIMMER - 4 ZONE TOUCH PANEL WALL REMOTE

DESCRIPTION:

The Single Color Dimmer 4-Zone Touch Panel Wall Remote offers smooth, precise control over your LED lighting. Designed with advanced capacitive touch technology and 2.4GHz RF wireless transmission, it provides a reliable and responsive user experience. Its sleek design includes magnetic installation for easy mounting. Ideal for residential and commercial lighting projects requiring flexible brightness control.

FEATURES:

- High-precision capacitive touch panel for accurate, stable control
- 2.4GHz RF wireless technology for long-range, low-power communication
- Magnetic backplate for simple wall installation
- Supports control of up to 4 independent lighting zones
- Smooth, flicker-free brightness adjustment
- Responsive touch panel with fast signal transmission
- Energy-efficient design with ultra-low standby power consumption
- Control distance up to 98.4ft
- Fully adjustable brightness levels
- Battery-powered for flexible installation without wiring




APPLICATIONS:

- Home lighting automation
- Office and commercial space lighting
- Retail displays and showcases
- Hospitality lighting (hotels, restaurants)
- Smart lighting control systems


TECHNICAL SPECIFICATIONS:

Working Voltage	3V (2 × AAA batteries)
Standby Power Consumption	20μA
Transmitting Power	6dBm
Wireless Frequency	2.4GHz
Transmission Frequency Range	2400–2483.5MHz
Modulation Method	GFSK
Control Distance	Up to 98.4ft
Operating Temperature Range	14°F to 104°F

DIMENSIONS:

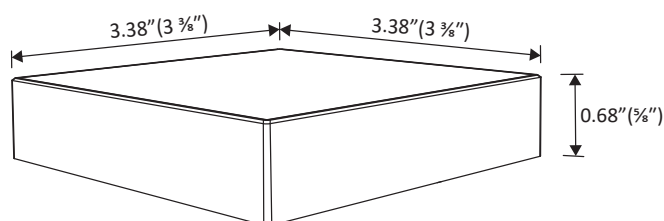

KEY FUNCTIONS:

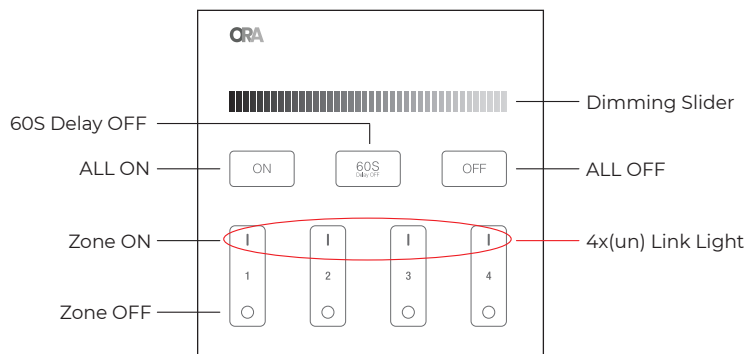

Use the touch dimming slider to adjust brightness continuously from 1% to 100%.

ON Touch the Master ON button to turn on all linked lights. Press and hold for 5 seconds to enable the indicator sound.

60S When the light is ON, press the "60S Delay OFF" button to automatically turn off the light after 60 seconds.


OFF Touch the Master OFF button to turn off all linked lights. Press and hold for 5 seconds to disable the indicator sound.

I Touch the Zone ON button to activate the lights in the selected zone.


O Touch the Zone OFF button to deactivate the lights in the selected zone.

Note: When a button is touched, the LED indicator will flash once and emit a sound. Touching the slider will only cause the LED indicator to flash, without any sound.


LINKING INSTRUCTIONS:

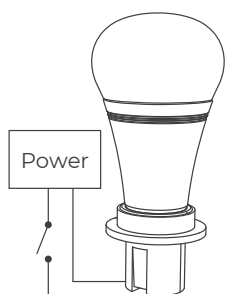

1 Turn off the light, wait for 10 seconds, then turn it on again.

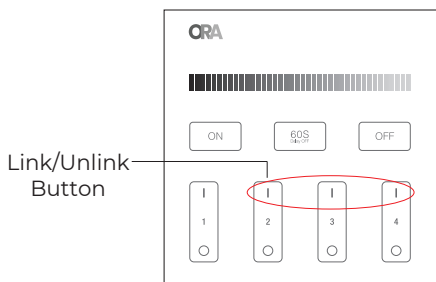


2 When the light is on, press any zone "I" button three times within 3 seconds.

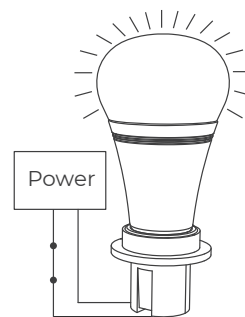


3 If the light blinks slowly three times, the linking has been successfully completed.

! If the light does not blink slowly, the linking has failed. Please turn off the light and repeat the steps above.

UNLINKING INSTRUCTIONS:

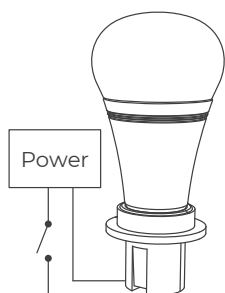


1 Turn off the light, wait for 10 seconds, then turn it on again.

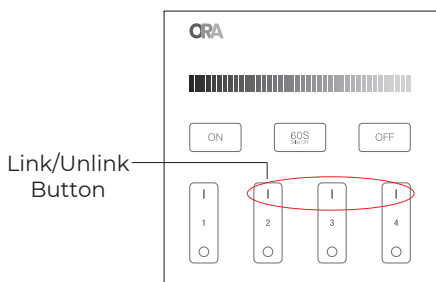

2 When the light is on, press "I" five times within 3 seconds.


Unlinking must be performed in the same zone as the linking.

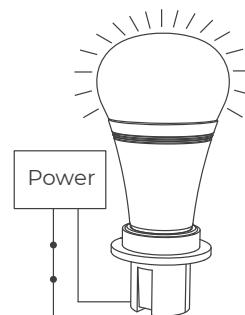


3 If the light blinks ten times quickly, the unlinking has been successful.

! If the light does not blink quickly, the unlinking has failed. Please turn off the light and repeat the steps to unlink again.


INSTALLATION:

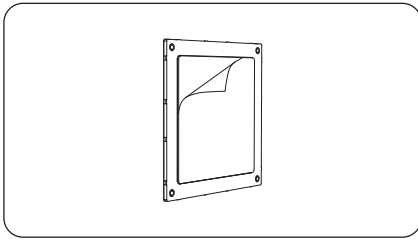


1. Remove the backing tape.

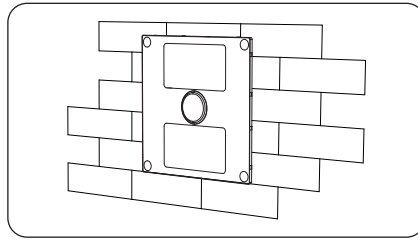

2. Attach the holder to the desired position.

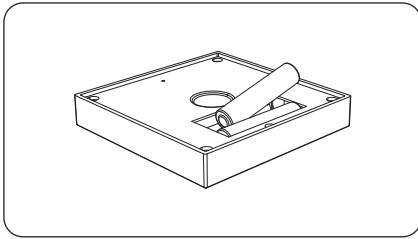

3. Insert 2 × AAA batteries.

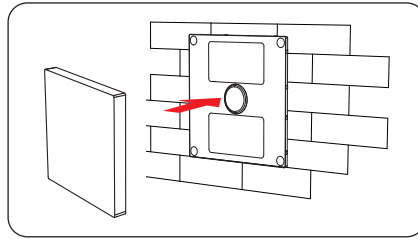

4. Place the rotating switch on the front of the holder.

ATTENTION:

1. Before powering on, ensure the cable is properly connected and the circuit is correct.
2. During installation, handle the T series glass panel carefully to avoid damage.
3. Avoid placing lighting fixtures near metal surfaces or high magnetic fields, as this can significantly reduce the control distance.

COMPATIBLE PRODUCT (SOLD SEPARATELY):



Smart WiFi LED Controller Gateway – G3 with Voice Control
SKU: MILI-WIFI-BRIDGE-G3