

RGB+CCT 8 ZONE REMOTE

DESCRIPTION:

The RGB+CCT 8 Zone Remote is a high-performance wireless controller designed for seamless operation of 2.4GHz RF-compatible smart lighting systems. Featuring advanced GFSK modulation, it ensures low power consumption, long-range signal transmission, and strong anti-interference capabilities. This remote allows precise control over color, color temperature, brightness, and saturation, delivering a fully customizable lighting experience.

FEATURES:

- 2.4GHz RF wireless transmission for reliable signal performance
- Part of ORA Smart Home Lighting system
- Supports up to 8 zones for multi-group lighting control
- 16 million colors to choose from
- Adjustable light color, color temperature, saturation, and brightness
- Long-range operation with a control distance of up to 98.4 ft
- Smartphone control through iOS and Android app
- Strong anti-interference and fast communication rate
- Low power consumption for extended battery life
- Easy Copy function for quick setup and synchronization
- Built-in child lock for added safety
- Requires 2 AAA batteries (sold separately)
- Ergonomic design with user-friendly interface



APPLICATIONS:


- Home lighting control
- Commercial lighting control
- Event and stage lighting control
- Photography and videography lighting setups
- Architectural and landscape lighting design

TECHNICAL SPECIFICATIONS:

Working Voltage	3V (AAA * 2PCS)
Standby Power Consumption	20μA
Transmitting Power	6dBm
RF	2.4GHz
Transmission Frequency	2400-2483.5MHz
Modulation Method	GFSK
Working Temperature	-4°F ~ 140°F
Control Distance	98.4 ft



PRODUCT KEY DIAGRAM:

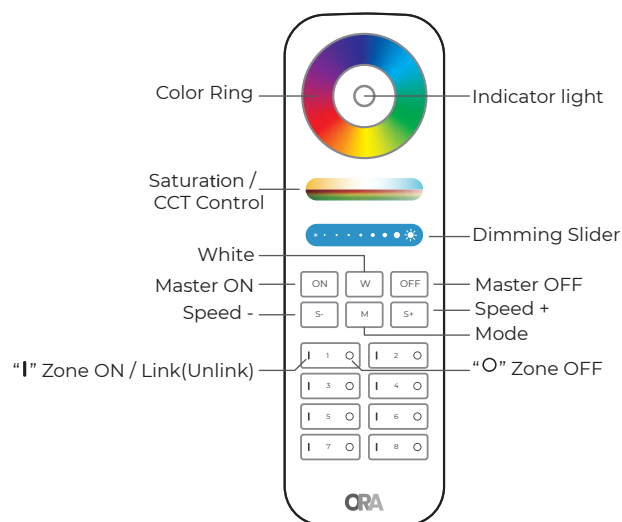


- Color Control: Tap the color ring to select your preferred color.
- White Light Mode: Adjust the color temperature when in white light mode. Color Light Mode: Fine-tune the color saturation in color light mode.
- Brightness Adjustment: Use the slider to set the desired brightness level.
- Quick White Light: Press the button to instantly switch to white light.
- Power On: Touch the ON button to turn on the connected device.
- Power Off: Touch the OFF button to turn off the connected device.
- Dynamic Mode Selection: Switch between different dynamic lighting modes with a single touch.
- Speed Up Effects: Increase the speed of dynamic lighting effects.
- Slow Down Effects: Reduce the speed of dynamic lighting effects.

DIMENSIONS:



GROUPING MULTIPLE LIGHTS:

You can link an unlimited number of lights to each zone on the 8-channel remote. This gives you complete flexibility to create various group combinations. Below are some examples of possible group setups.

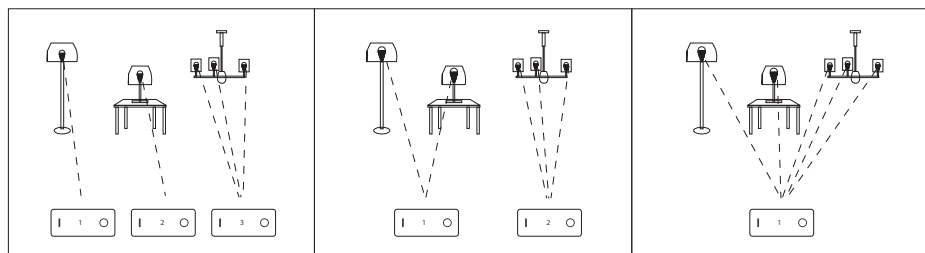


Attention:

1. The remote can be reprogrammed as needed. One remote can control an unlimited number of lamps or controllers, but each lamp or controller can be paired with a maximum of four remotes.
2. Before programming, ensure the batteries are installed correctly and the controller is completely powered off and on to reset.

LINKING CODE / UNLINKING CODE INSTRUCTIONS:

Note: The light will function only after being linked to the remote.

Linking Code Instructions

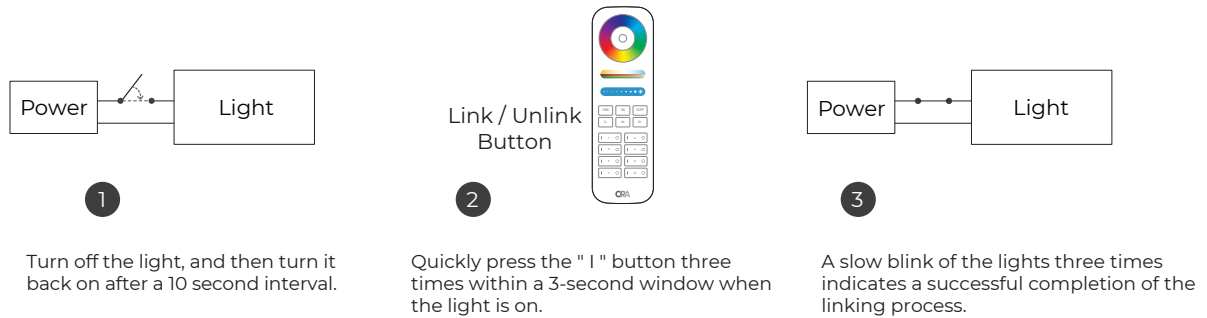

! Linking has failed if the light does not exhibit a slow blink. Please repeat the above steps. (Note: Lights that have already been linked cannot be linked again.)

Unlinking Code Instructions:



! Unlinking has not succeeded if the light is not blinking rapidly. Please repeat the steps outlined above. (Note: Lights that have not been linked do not need to be unlinked.)

COMPATIBLE DEVICES:



ORA 3 in 1 LED Strip Light Controller
(RGB, RGBW, RGBCT)
SKU: MILI-CONT-3IN1-RGBXX



G3 LED WiFi Gateway
SKU: MILI-WIFI-BRIDGE-G3

ORA RGB+CCT Bulbs

SKU: MILI-PAR38-10W-RGBCB
SKU: MILI-MR16-4W-RGBCB
SKU: MILI-GU10-4W-RGBCB
SKU: MILI-A21-12W-RGBCB
SKU: MILI-A19-9W-RGBCB
SKU: MILI-A16-6W-RGBCB

ORA RGB+CCT Garden Lights


SKU: MILI-GL-100W-RGBCB-OD-120V
SKU: MILI-GL-50W-RGBCB-OD-120V
SKU: MILI-GL-9W-RGBCB-OD-24V
SKU: MILI-GL-9W-RGBCB-OD-120V
SKU: MILI-GL-6W-RGBCB-OD-120V
SKU: MILI-GL-15W-RGBCB-OD-120V

ORA RGB+CCT Flood Lights

SKU: MILI-FL-50W-RGBCB
SKU: MILI-FL-30W-RGBCB
SKU: MILI-FL-10W-RGBCB
SKU: MILI-FL-100W-RGBCB

SIGNAL TRANSMITTING:

One device can transmit signals from the remote control to another device within 98.4ft. As long as there is a device within 98.4ft, the remote control distance can be unlimited.

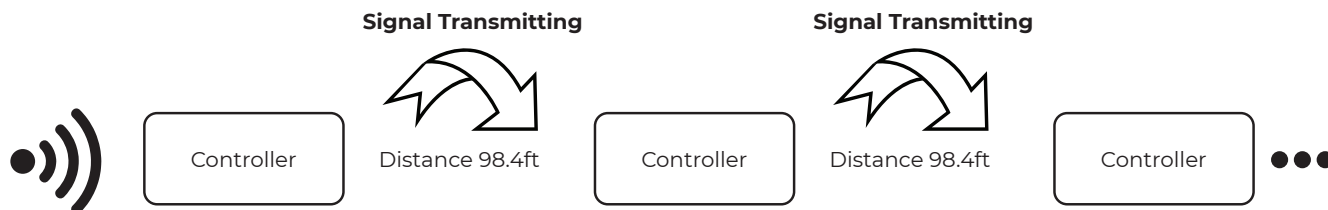

ATTENTION:

1. This remote is compatible only with specified RGB+CCT smart lighting products. It may not work with all models in the series.
2. If the connected light blinks rapidly during use, replace the batteries promptly. Avoid using low-quality batteries to prevent leakage and potential damage to the remote.
3. This 2.4GHz remote is a sensitive electronic device. Do not use it in humid, high-temperature, dusty, or high-voltage environments. Store it indoors in a dry, static-free space.
4. Avoid using the remote near large metal surfaces or in areas with strong electromagnetic interference, as this may significantly reduce the control range.